

PRODUCT DATASHEET

P CLAS A 150 16 W/2700 K E27

PARATHOM® CLASSIC A | LED lamps, classic bulb shape



Areas of application

- Perfect for decorative installations
- Domestic applications
- General illumination
- Outdoor use in outdoor luminaires only (minimum IP65)

Product benefits

- Lamps with innovative LED "filament" technology
- Design, dimensions, luminous flux comparable to an incandescent or halogen lamp
- Very low energy consumption
- No UV and near-IR radiation in the light beam
- Instant 100 % light, no warm-up time
- Can be easily fitted instead of ordinary light bulbs

Product features

- Professional LED lamps for line voltage
- Beam angle: up to 300°
- Not dimmable
- Base: E27
- Lifetime: up to 15,000 h
- Lamp made of glass
- Good quality of light; color rendering index $R_a \geq 80$; constant chromaticity



TECHNICAL DATA

Electrical data

Nominal wattage	16 W
Construction wattage [PICOS]	16.00 W
Claimed equiv. conventional lamp power	150 W
Nominal voltage	220...240 V
Nominal current	115 mA
Type of current	AC
Inrush current	2.54 A
Operating frequency	50...60 Hz
Mains frequency	50...60 Hz
Max. lamp no. on circuit break. 10 A (B)	30
Max. lamp no. on circuit break. 16 A (B)	50
Power factor λ	> 0.50


Photometrical data

Luminous flux	2500 lm
Nominal useful luminous flux 90°	2500 lm
Luminous efficacy	156 lm/W
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
EPREL - Correlated colour temperature type	SINGLE_VALUE
Color temperature	2700 K
Color rendering index Ra	≥80
Light color	827
Standard deviation of color matching	≤6 sdcn
Rated LLMF at 6,000 h	0.80

Light technical data

Beam angle	330 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s
Rated beam angle (half peak value)	330.00 °

Dimensions & weight

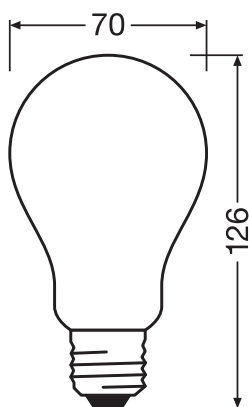

Overall length	126.00 mm
Length	126.00 mm
Width (incl. round luminaires)	70.00 mm
Height (incl. round luminaires)	70.00 mm
Diameter	70.00 mm
Maximum diameter	70 mm
Product weight	45.00 g

Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
Maximum temperature at tc test point	84 °C

Lifespan

Nominal lamp life time	15000 h
Number of switching cycles	100000
Lumen maintenance at end of serv	0.70
Rated lamp survival factor at 6,000	≥ 0.90

Additional product data

Base (standard designation)	E27
Mercury content	0.0 mg
Mercury-free	Yes
Design / version	Frosted

Product remark	All technical parameters apply to the entire lamp / Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value
EPREL - Light source cap-type (or other electric interface)	E27

Capabilities

Dimmable	No
----------	----

Certificates & standards





Energy efficiency class	A++ ¹⁾
Energy consumption	16.00 kWh/1000h
Type of protection	IP20
Standards	CE
Photobiological safety group acc. to EN62778	RG1

¹⁾ Energy efficiency class (EEC) on a scale of A++ (highest efficiency) to E (lowest efficiency)

Country-specific categorizations

Order reference	LEDPCLA150 16W/
-----------------	-----------------

DOWNLOAD DATA

DOWNLOAD DATA	
	Certificates 20 04 0004 01.04.2020 OPTOTRONIC
	Certificates EAEC N RU D-DE.MYu62.B.00978 20 10.03.2020-09.03.2025
	Certificates EAEC N RU D-DE.MYu62.B.01095 20 16.03.2020-15.03.2025
	Certificates RU C-RU.AJa46.B.87593 13.09.2018-09.09.2023

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075439733	Folding box 1	70 mm x 70 mm x 143 mm	69.00 g	0.70 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075439740	Shipping box 10	364 mm x 150 mm x 157 mm	680.00 g	8.57 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.