



## Soluzioni Free Multi Z

### 1. Flessibilità

- Fino a 5 unità interne con una sola unità esterna
- Fino a 5 stanze con controllo individuale
- Unità compatte e lunga distanza di collegamento

### 2. Migliore qualità dell'aria con la tecnologia nanoe™ X

- Unità interne con tecnologia nanoe™ X con i benefici dei radicali idrossilici\*.

\* Non applicabile al tipo a scomparsa

### 3. Alta efficienza energetica

- Classe di efficienza energetica A+++ SEER

### 4. Controllo intelligente

- Unità interne compatibili con il controllo via internet tramite l'app Panasonic Comfort Cloud
- Compatibile con Google Assistant e Amazon Alexa



## Tecnologia per il massimo del comfort




### Free Multi Z, un'ampia gamma di possibilità

**La soluzione multi split offre un'elevata flessibilità, in quanto è possibile collegare da 2 a 5 unità interne a un'unica unità esterna.**

L'ampia gamma di unità interne compatibili comprende le unità a parete Etherea e TZ, la console a pavimento, la cassetta a 4 vie 60x60 e le unità a scomparsa a bassa pressione statica.

### Perché scegliere un sistema multisplit

- Un'unità esterna compatta per tutte le unità interne
- Maggiore comfort in ogni stanza con unità interne individuali per il riscaldamento o il raffreddamento
- Molto più potente di un singolo split
- Maggiore efficienza con le unità che funzionano a pieno regime
- Flessibilità nel collegare vari tipi di unità interne, tra cui quelle a parete e quelle a console, per adattarsi alle esigenze della vostra casa.

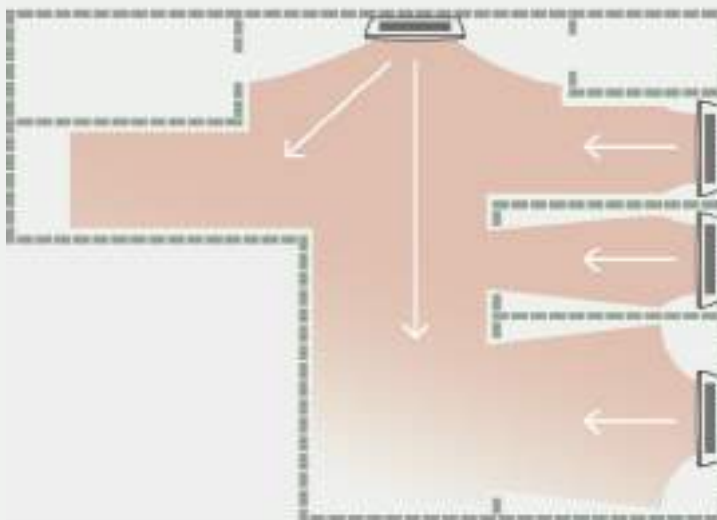

### Piena flessibilità fino a 9,0kW e fino a 5 porte

Panasonic vi offre la soluzione che si adatta perfettamente al vostro progetto in termini di capacità totale, capacità interna singola e scelta del tipo di interno. Dimensioni, prestazioni, silenziosità e altre caratteristiche eccezionali possono essere scelte tra la gamma multi gratuita di Panasonic.

a: Camere

| 2 [a]      |            |            | 3 [a]      |            |
|------------|------------|------------|------------|------------|
| 3,2~4, kW  | 3,2~6,0kW  | 3,2~7,7kW  | 4,5~9,5kW  | 4,5~11,2kW |
|            |            |            |            |            |
| CU-2235TBE | CU-2461TBE | CU-2250TBE | CU-3252TBE | CU-3268TBE |

| 4 [a]      |            | 5 [a]      |
|------------|------------|------------|
| 4,5~11,5kW | 4,5~14,7kW | 4,5~18,3kW |
|            |            |            |
| CU-4268TBE | CU-4280TBE | CU-5280TBE |

## Elevata flessibilità installativa, migliore qualità dell'aria e comfort



nanoeX

### Etherea a parete

#### Design elegante e raffinato

- Da 1,6 a 7,1 kW
- Disponibile in 3 colori
- Nuovo nanoe X Generator Mark 3 integrato
- Wi-Fi integrato



nanoeX

### TZ a parete supercompatto

#### Per gli spazi più piccoli della casa

- Da 1,6 a 7,1 kW
- Nuovo generatore nanoe X Mark 1 integrato
- Wi-Fi integrato



nanoeX

### Console a pavimento

#### Comfort efficiente e aria pulita tutto l'anno

- Da 2,0 a 5,0 kW
- Generatore nanoe X Mark 1 incorporato
- Wi-Fi opzionale (CZ-TACG1)



nanoeX

### Cassetta 4 vie 60x60

#### Design compatto ed elegante

- Da 2,0 a 6,0 kW
- Generatore nanoe X Mark 2 incorporato
- Ampia gamma di telecomandi CONEX
- Pompa di scarico incorporata



### Bassa pressione statica a scomparsa

#### Unità compatte con pressione statica mantenuta

- Da 2,0 a 6,0 kW
- Wi-Fi opzionale CZ-TACG1
- Pompa di scarico incorporata



## Migliore qualità dell'aria con la tecnologia nanoe™ X



**Portare l'equilibrio della natura in casa**  
**nanoe™ X, la tecnologia con i benefici dei radicali idrossilici**  
 Abbondanti in natura, i radicali idrossilici hanno la capacità di inibire gli agenti inquinanti. nanoe™ X, la tecnologia in grado di portare questi incredibili benefici all'interno degli ambienti, in modo che le superfici dure, gli arredi morbidi e l'ambiente interno possano essere un luogo più pulito e piacevole.

**7 effetti di nanoe™ X - la tecnologia unica di Panasonic**

- 1. Capacità di inibire 5 tipi di inquinanti:** Batteri e virus - Muffa - Allergeni - Polline - Sostanze pericolose.
- 2. Deodora:** Odori
- 3. Idrata:** Pelle e capelli



### nanoe™ X: migliora la qualità dell'aria 24/7

Date al climatizzatore la forza di aumentare la protezione in casa con la tecnologia nanoe™ X e il comodo controllo tramite l'App Panasonic Comfort Cloud.

nanoe™ X funziona insieme alla funzione di riscaldamento o raffreddamento quando siete a casa e può funzionare in modo indipendente quando siete fuori.




### Confronto del tempo necessario per inibire il 99% del polline di cedro

Il risultato di nanoe X Generator Mark 3.

Inibisce il polline in 1/4 del tempo di nanoe X Generator Mark 2\*.

\* Effetto dopo 3 ore in uno spazio di prova di circa 24 m³. Le cifre non rappresentano i risultati dei test in uno spazio operativo reale.

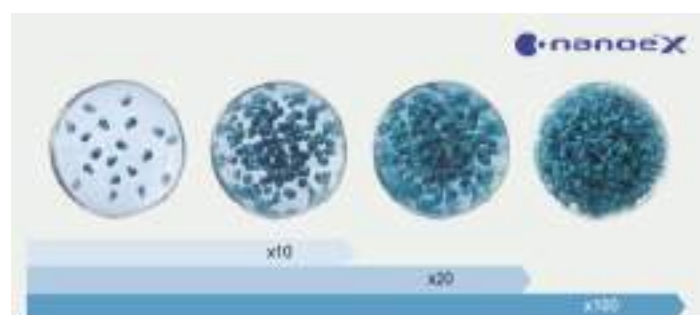

### L'evoluzione delle nanoe™

Il fattore decisivo per gli effetti di pulizia è la quantità di radicali idrossilici contenuti nelle particelle di nanoe™ X.

- 1. nanoe™ (originale).** 480 miliardi
- 2. nanoe X Generator Mark 1.** 4,8 trilioni
- 3. nanoe X Generator Mark 2.** 9,6 trilioni
- 4. nanoe X Generator Mark 3.** 48 trilioni



## Controlli Smart & Intuitivi



### App Panasonic Comfort Cloud

**Che siate a casa, in ufficio o in azienda, Panasonic Comfort Cloud App vi permette di avere il controllo totale della qualità dell'aria interna a portata di mano.**

**Controllo remoto:** Controlla e monitora i tuoi condizionatori d'aria in qualsiasi momento e da qualsiasi luogo.

**Monitoraggio del consumo energetico:** Controlla il consumo energetico di ogni singola unità in diversi intervalli di tempo, confrontando i modelli di utilizzo dell'energia per massimizzare il risparmio energetico.

**nanoe™ X: migliore qualità dell'aria 24/7\*:** Attivate la modalità nanoe™ X con raffreddamento disattivato/attivato e vedete la copertura nanoe™ X nel vostro spazio attraverso una simulazione.

\* Solo per le unità compatibili con la funzione nanoe™ X.

### Controllo vocale. Le parole fanno più dei fatti

Ottimizzare il vostro comfort è ora un gioco da ragazzi con i nostri condizionatori compatibili con l'App Panasonic Comfort Cloud e il controllo vocale.

\* Google, Android, Google Play e Google Home sono marchi di Google LLC. Amazon, Alexa e tutti i relativi loghi sono marchi di Amazon.com, Inc. o delle sue affiliate. La disponibilità dei servizi di assistente vocale varia a seconda del Paese e della lingua.



### Configuratore per condizionatore residenziale

Questo strumento online di facile utilizzo per la nostra gamma domestica consente di scegliere il sistema split o multi-split più adatto alle esigenze di ogni progetto e di ottenere le specifiche di quella particolare applicazione.

**Configurate in pochi passi il vostro sistema multi split con il nostro strumento online e vedete la capacità di tutte le combinazioni possibili.**



### Realtà Aumentata Panasonic

Siete interessati a vedere come appare un condizionatore Panasonic a casa vostra?

**Provate il nuovo proiettore AR Panasonic, che utilizza la realtà aumentata!**

## Accessori


| <p>1</p>  | <p>2</p>  | <p>3</p>  | <table border="1"> <thead> <tr> <th colspan="2">Accessories</th> </tr> </thead> <tbody> <tr> <td>1. CZ-RD517C</td> <td>Wired remote controller for wall-mounted and floor console</td> </tr> <tr> <td>2. CZ-RL511D</td> <td>Infrared remote controller Sky Remote. 2 m cable length of infrared receiver for hide-away</td> </tr> <tr> <td>3. CZ-RTC4W</td> <td>CONEX wired remote controller (non-wireless), white</td> </tr> <tr> <td>3. CZ-RTC4WBLW</td> <td>CONEX wired remote controller with Wi-Fi and Bluetooth®. white</td> </tr> <tr> <td>4. CZ-RTC4</td> <td>CONEX wired remote controller (non-wireless), black</td> </tr> <tr> <td>4. CZ-RTC4BLW</td> <td>CONEX wired remote controller with Wi-Fi and Bluetooth®, black</td> </tr> <tr> <td>5. CZ-KPY4</td> <td>Panel for 4 way 60x60 cassette - P13</td> </tr> <tr> <td>6. CZ-TACG1</td> <td>Wi-Fi adapter for smart control via Panasonic Comfort Cloud App</td> </tr> </tbody> </table> | Accessories |  | 1. CZ-RD517C | Wired remote controller for wall-mounted and floor console | 2. CZ-RL511D | Infrared remote controller Sky Remote. 2 m cable length of infrared receiver for hide-away | 3. CZ-RTC4W | CONEX wired remote controller (non-wireless), white | 3. CZ-RTC4WBLW | CONEX wired remote controller with Wi-Fi and Bluetooth®. white | 4. CZ-RTC4 | CONEX wired remote controller (non-wireless), black | 4. CZ-RTC4BLW | CONEX wired remote controller with Wi-Fi and Bluetooth®, black | 5. CZ-KPY4 | Panel for 4 way 60x60 cassette - P13 | 6. CZ-TACG1 | Wi-Fi adapter for smart control via Panasonic Comfort Cloud App |
|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--|--------------|------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------------|-------------|-----------------------------------------------------|----------------|----------------------------------------------------------------|------------|-----------------------------------------------------|---------------|----------------------------------------------------------------|------------|--------------------------------------|-------------|-----------------------------------------------------------------|
| Accessories                                                                               |                                                                                            |                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |             |  |              |                                                            |              |                                                                                            |             |                                                     |                |                                                                |            |                                                     |               |                                                                |            |                                      |             |                                                                 |
| 1. CZ-RD517C                                                                              | Wired remote controller for wall-mounted and floor console                                 |                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |             |  |              |                                                            |              |                                                                                            |             |                                                     |                |                                                                |            |                                                     |               |                                                                |            |                                      |             |                                                                 |
| 2. CZ-RL511D                                                                              | Infrared remote controller Sky Remote. 2 m cable length of infrared receiver for hide-away |                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |             |  |              |                                                            |              |                                                                                            |             |                                                     |                |                                                                |            |                                                     |               |                                                                |            |                                      |             |                                                                 |
| 3. CZ-RTC4W                                                                               | CONEX wired remote controller (non-wireless), white                                        |                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |             |  |              |                                                            |              |                                                                                            |             |                                                     |                |                                                                |            |                                                     |               |                                                                |            |                                      |             |                                                                 |
| 3. CZ-RTC4WBLW                                                                            | CONEX wired remote controller with Wi-Fi and Bluetooth®. white                             |                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |             |  |              |                                                            |              |                                                                                            |             |                                                     |                |                                                                |            |                                                     |               |                                                                |            |                                      |             |                                                                 |
| 4. CZ-RTC4                                                                                | CONEX wired remote controller (non-wireless), black                                        |                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |             |  |              |                                                            |              |                                                                                            |             |                                                     |                |                                                                |            |                                                     |               |                                                                |            |                                      |             |                                                                 |
| 4. CZ-RTC4BLW                                                                             | CONEX wired remote controller with Wi-Fi and Bluetooth®, black                             |                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |             |  |              |                                                            |              |                                                                                            |             |                                                     |                |                                                                |            |                                                     |               |                                                                |            |                                      |             |                                                                 |
| 5. CZ-KPY4                                                                                | Panel for 4 way 60x60 cassette - P13                                                       |                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |             |  |              |                                                            |              |                                                                                            |             |                                                     |                |                                                                |            |                                                     |               |                                                                |            |                                      |             |                                                                 |
| 6. CZ-TACG1                                                                               | Wi-Fi adapter for smart control via Panasonic Comfort Cloud App                            |                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |             |  |              |                                                            |              |                                                                                            |             |                                                     |                |                                                                |            |                                                     |               |                                                                |            |                                      |             |                                                                 |
| <p>4</p>  | <p>5</p>  | <p>6</p>  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |             |  |              |                                                            |              |                                                                                            |             |                                                     |                |                                                                |            |                                                     |               |                                                                |            |                                      |             |                                                                 |

| <p>7</p>    | <p>8</p>    | <p>9</p>    | <table border="1"> <thead> <tr> <th colspan="2">Accessories</th> </tr> </thead> <tbody> <tr> <td>7. PAW-AC-KNX-11</td> <td>KNX interface. Can be used with all models which have a CN-CNT connector (Intesis).</td> </tr> <tr> <td>8. PAW-AC-MBS-1</td> <td>Modbus interface. Can be used with all models which have a CN-CNT connector (Intesis).</td> </tr> <tr> <td>9. PAW-AC-BAC-1</td> <td>BACnet interface. Can be used with all models which have a CN-CNT connector (Intesis).</td> </tr> <tr> <td>10. PAW-AZAC-KNX-1</td> <td>KNX interface. Can be used with all models which have a CN-CNT connector (Airzone)</td> </tr> <tr> <td>11. PAW-AZAC-MBS-1</td> <td>Modbus interface. Can be used with all models which have a CN-CNT connector (Airzone)</td> </tr> <tr> <td>12. PAW-AZAC-BAC-1</td> <td>BACnet interface. Can be used with all models which have a CN-CNT connector (Airzone)</td> </tr> </tbody> </table> | Accessories |  | 7. PAW-AC-KNX-11 | KNX interface. Can be used with all models which have a CN-CNT connector (Intesis). | 8. PAW-AC-MBS-1 | Modbus interface. Can be used with all models which have a CN-CNT connector (Intesis). | 9. PAW-AC-BAC-1 | BACnet interface. Can be used with all models which have a CN-CNT connector (Intesis). | 10. PAW-AZAC-KNX-1 | KNX interface. Can be used with all models which have a CN-CNT connector (Airzone) | 11. PAW-AZAC-MBS-1 | Modbus interface. Can be used with all models which have a CN-CNT connector (Airzone) | 12. PAW-AZAC-BAC-1 | BACnet interface. Can be used with all models which have a CN-CNT connector (Airzone) |
|----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--|------------------|-------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------------------------------------|--------------------|------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------|
| Accessories                                                                                  |                                                                                               |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |             |  |                  |                                                                                     |                 |                                                                                        |                 |                                                                                        |                    |                                                                                    |                    |                                                                                       |                    |                                                                                       |
| 7. PAW-AC-KNX-11                                                                             | KNX interface. Can be used with all models which have a CN-CNT connector (Intesis).           |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |             |  |                  |                                                                                     |                 |                                                                                        |                 |                                                                                        |                    |                                                                                    |                    |                                                                                       |                    |                                                                                       |
| 8. PAW-AC-MBS-1                                                                              | Modbus interface. Can be used with all models which have a CN-CNT connector (Intesis).        |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |             |  |                  |                                                                                     |                 |                                                                                        |                 |                                                                                        |                    |                                                                                    |                    |                                                                                       |                    |                                                                                       |
| 9. PAW-AC-BAC-1                                                                              | BACnet interface. Can be used with all models which have a CN-CNT connector (Intesis).        |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |             |  |                  |                                                                                     |                 |                                                                                        |                 |                                                                                        |                    |                                                                                    |                    |                                                                                       |                    |                                                                                       |
| 10. PAW-AZAC-KNX-1                                                                           | KNX interface. Can be used with all models which have a CN-CNT connector (Airzone)            |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |             |  |                  |                                                                                     |                 |                                                                                        |                 |                                                                                        |                    |                                                                                    |                    |                                                                                       |                    |                                                                                       |
| 11. PAW-AZAC-MBS-1                                                                           | Modbus interface. Can be used with all models which have a CN-CNT connector (Airzone)         |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |             |  |                  |                                                                                     |                 |                                                                                        |                 |                                                                                        |                    |                                                                                    |                    |                                                                                       |                    |                                                                                       |
| 12. PAW-AZAC-BAC-1                                                                           | BACnet interface. Can be used with all models which have a CN-CNT connector (Airzone)         |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |             |  |                  |                                                                                     |                 |                                                                                        |                 |                                                                                        |                    |                                                                                    |                    |                                                                                       |                    |                                                                                       |
| <p>10</p>  | <p>11</p>  | <p>12</p>  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |             |  |                  |                                                                                     |                 |                                                                                        |                 |                                                                                        |                    |                                                                                    |                    |                                                                                       |                    |                                                                                       |


| <p>13</p>  | <p>14</p>  | <p>15</p>  | <table border="1"> <thead> <tr> <th colspan="2">Accessories</th> </tr> </thead> <tbody> <tr> <td>13. CZ-CAPRA1</td> <td>RAC interface adapter for integration into S-Link</td> </tr> <tr> <td>14. PAW-AC-DIO</td> <td>Interface. Can be used with all models which have a CN-RMT connector.</td> </tr> <tr> <td>15. CZ-MA1PA</td> <td>Reduces the connection size on the indoor unit from 1/2" to 3/8"</td> </tr> <tr> <td>16. CZ-MA2PA</td> <td>Increases the connection size on the outdoor unit from 3/8" to 1/2"</td> </tr> <tr> <td>17. CZ-MA3PA</td> <td>Reduces the connection size on the indoor unit from 5/8" to 1/2"</td> </tr> </tbody> </table> | Accessories |  | 13. CZ-CAPRA1 | RAC interface adapter for integration into S-Link | 14. PAW-AC-DIO | Interface. Can be used with all models which have a CN-RMT connector. | 15. CZ-MA1PA | Reduces the connection size on the indoor unit from 1/2" to 3/8" | 16. CZ-MA2PA | Increases the connection size on the outdoor unit from 3/8" to 1/2" | 17. CZ-MA3PA | Reduces the connection size on the indoor unit from 5/8" to 1/2" |
|----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--|---------------|---------------------------------------------------|----------------|-----------------------------------------------------------------------|--------------|------------------------------------------------------------------|--------------|---------------------------------------------------------------------|--------------|------------------------------------------------------------------|
| Accessories                                                                                  |                                                                                               |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |  |               |                                                   |                |                                                                       |              |                                                                  |              |                                                                     |              |                                                                  |
| 13. CZ-CAPRA1                                                                                | RAC interface adapter for integration into S-Link                                             |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |  |               |                                                   |                |                                                                       |              |                                                                  |              |                                                                     |              |                                                                  |
| 14. PAW-AC-DIO                                                                               | Interface. Can be used with all models which have a CN-RMT connector.                         |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |  |               |                                                   |                |                                                                       |              |                                                                  |              |                                                                     |              |                                                                  |
| 15. CZ-MA1PA                                                                                 | Reduces the connection size on the indoor unit from 1/2" to 3/8"                              |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |  |               |                                                   |                |                                                                       |              |                                                                  |              |                                                                     |              |                                                                  |
| 16. CZ-MA2PA                                                                                 | Increases the connection size on the outdoor unit from 3/8" to 1/2"                           |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |  |               |                                                   |                |                                                                       |              |                                                                  |              |                                                                     |              |                                                                  |
| 17. CZ-MA3PA                                                                                 | Reduces the connection size on the indoor unit from 5/8" to 1/2"                              |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |  |               |                                                   |                |                                                                       |              |                                                                  |              |                                                                     |              |                                                                  |
| <p>16</p>  | <p>17</p>  |                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |  |               |                                                   |                |                                                                       |              |                                                                  |              |                                                                     |              |                                                                  |

## Dimensions

Wall-mounted Etherea (from 1,6 to 4,2 kW)

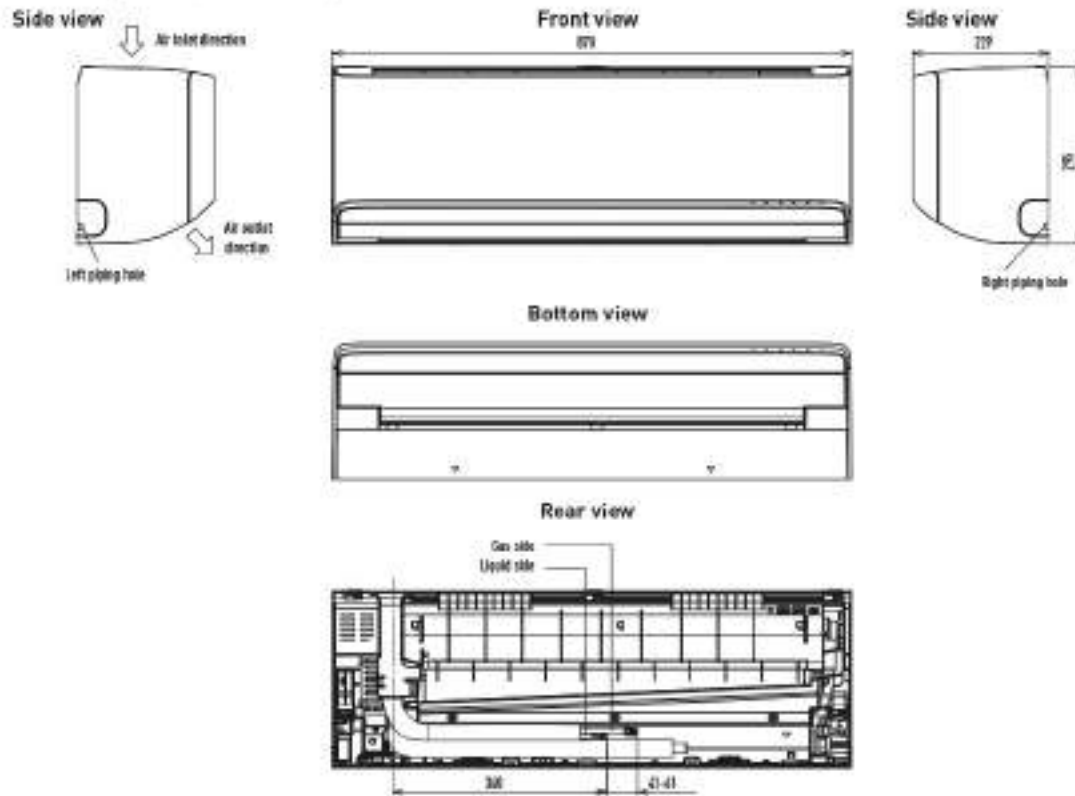


Relative position between the indoor unit and the installation plate

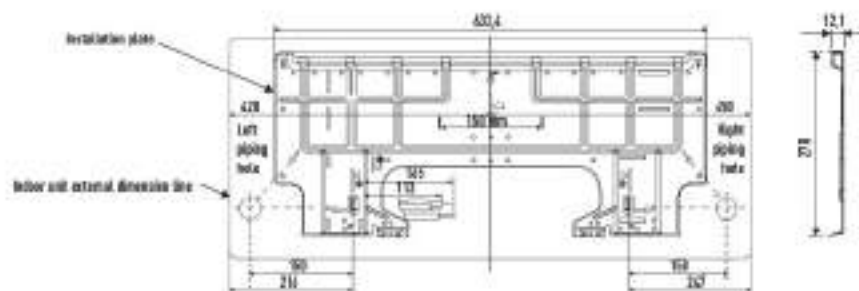

## Dimensions


Wall-mounted Etherea (5,0 and 7,1 kW)

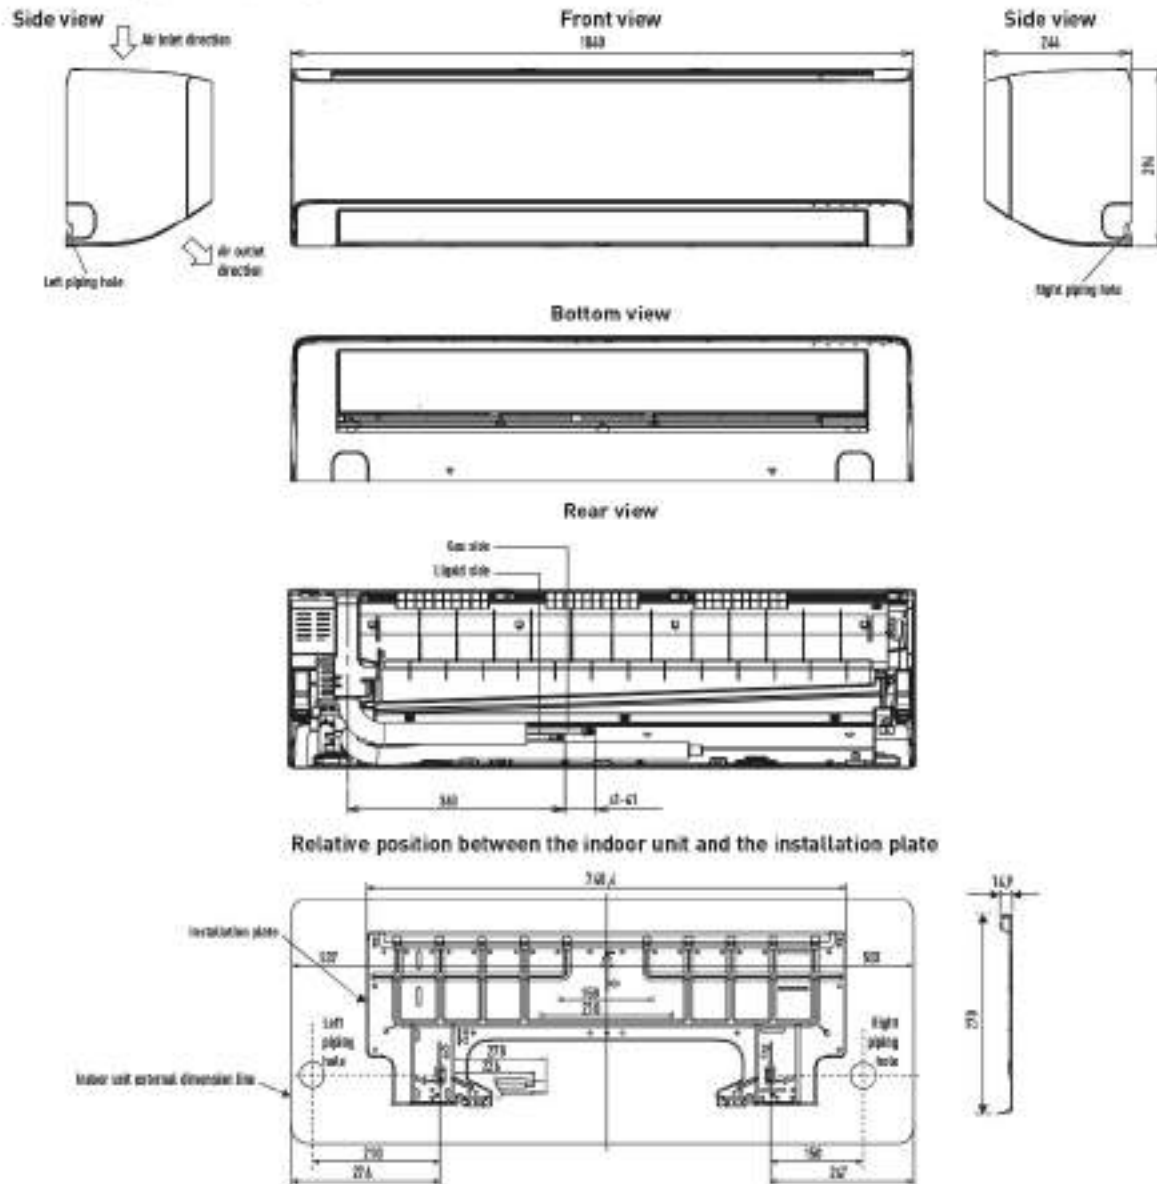

Unit: mm


## Dimensions

Wall-mounted TZ super-compact (from 1,6 to 5,0 kW)

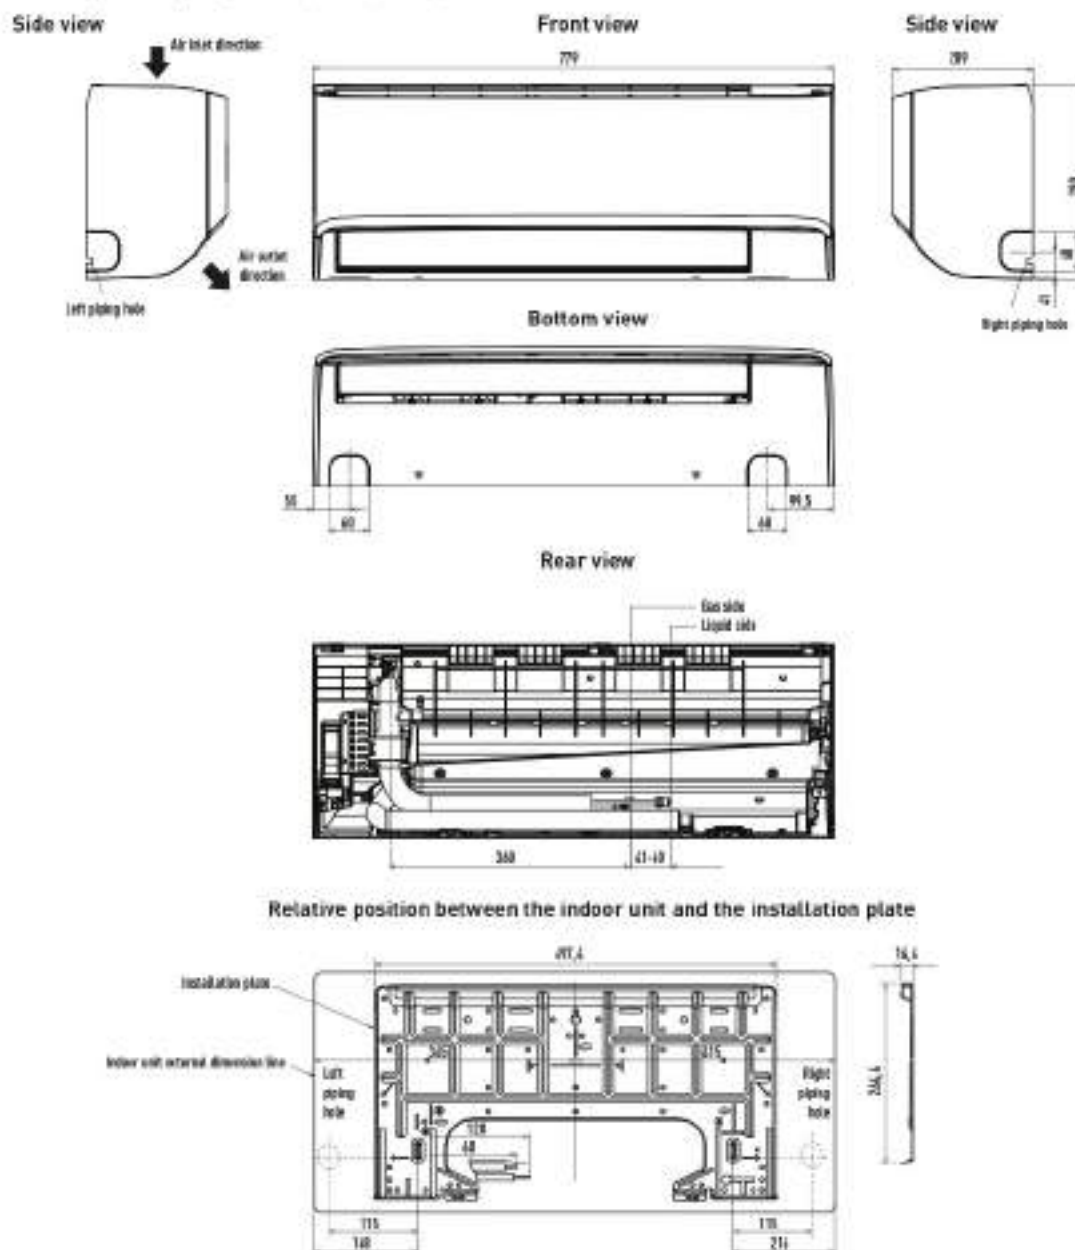


Dimensions

Wall-mounted TZ super-compact (6,0 and 7,1 kW)

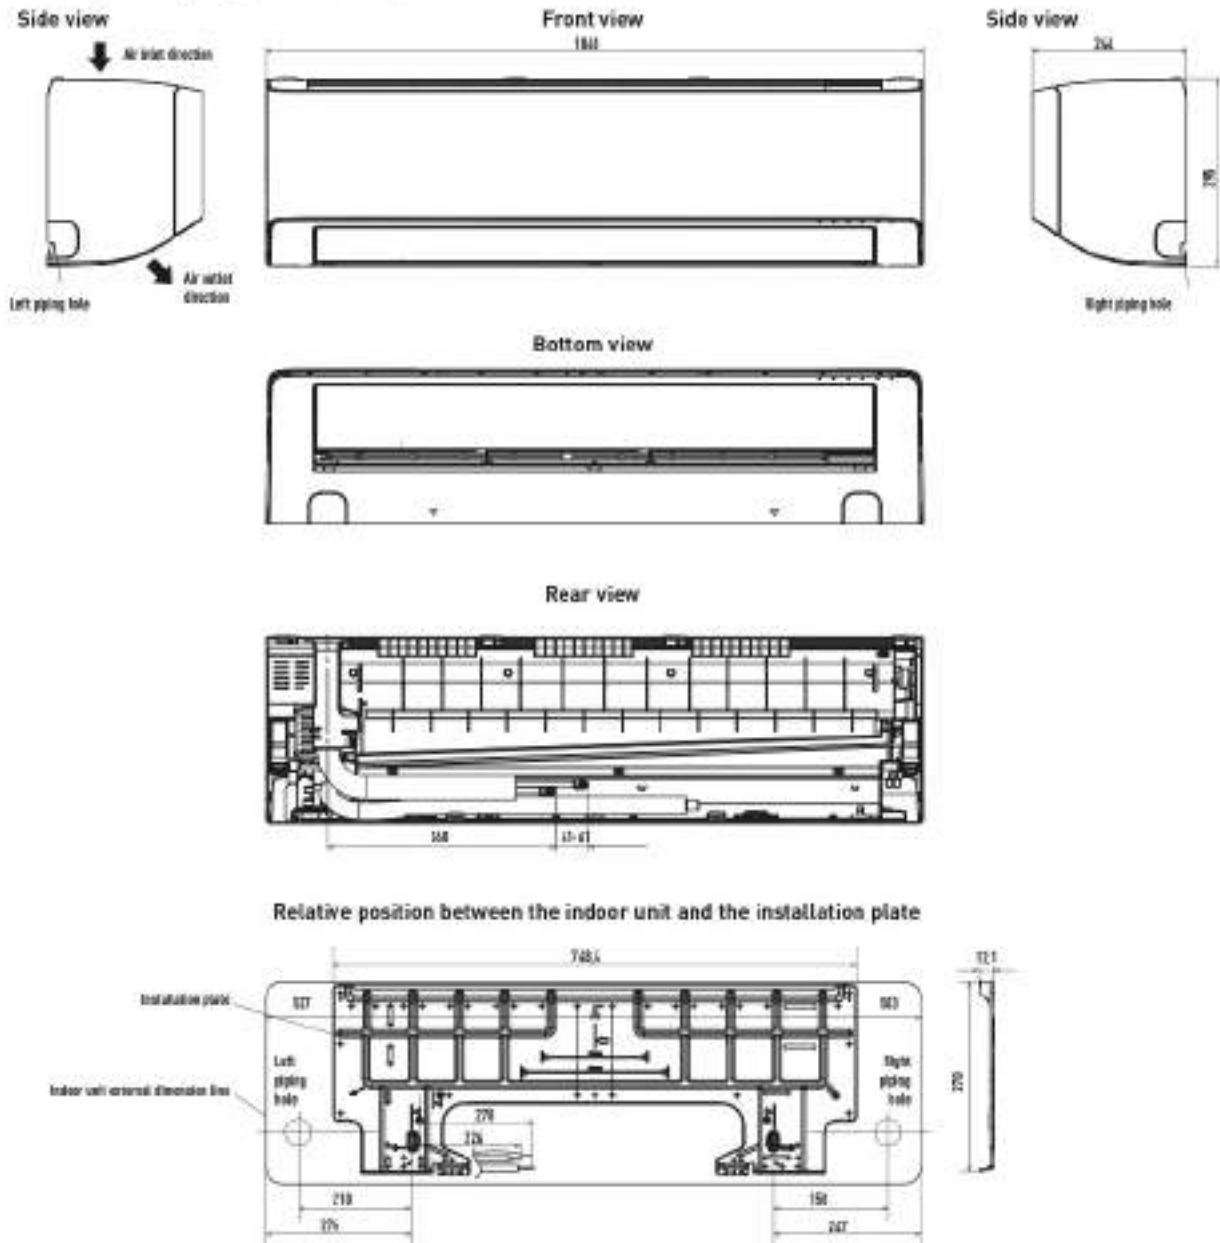


Dimensions


Floor console.

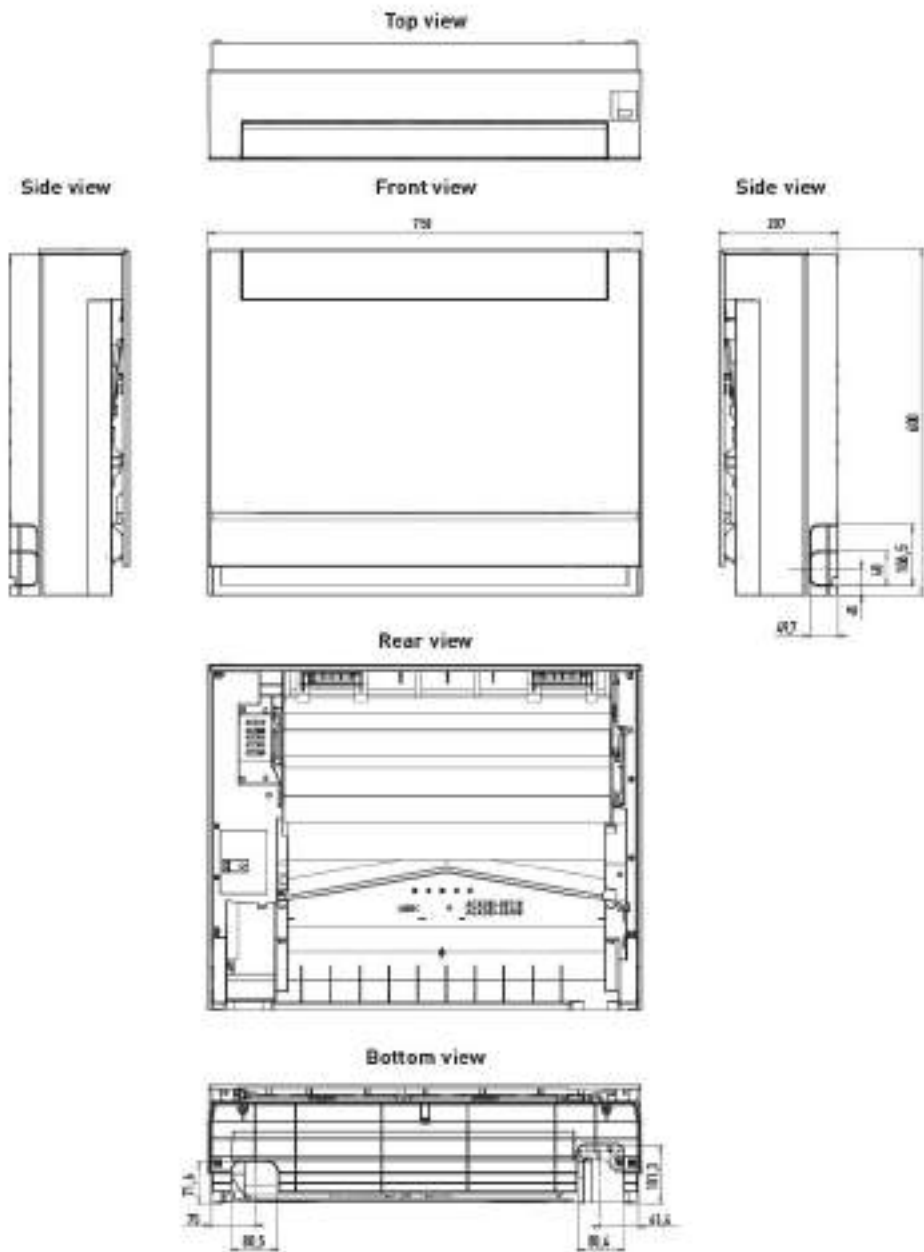

PACi NX Series 4 way 60x60 cassette.

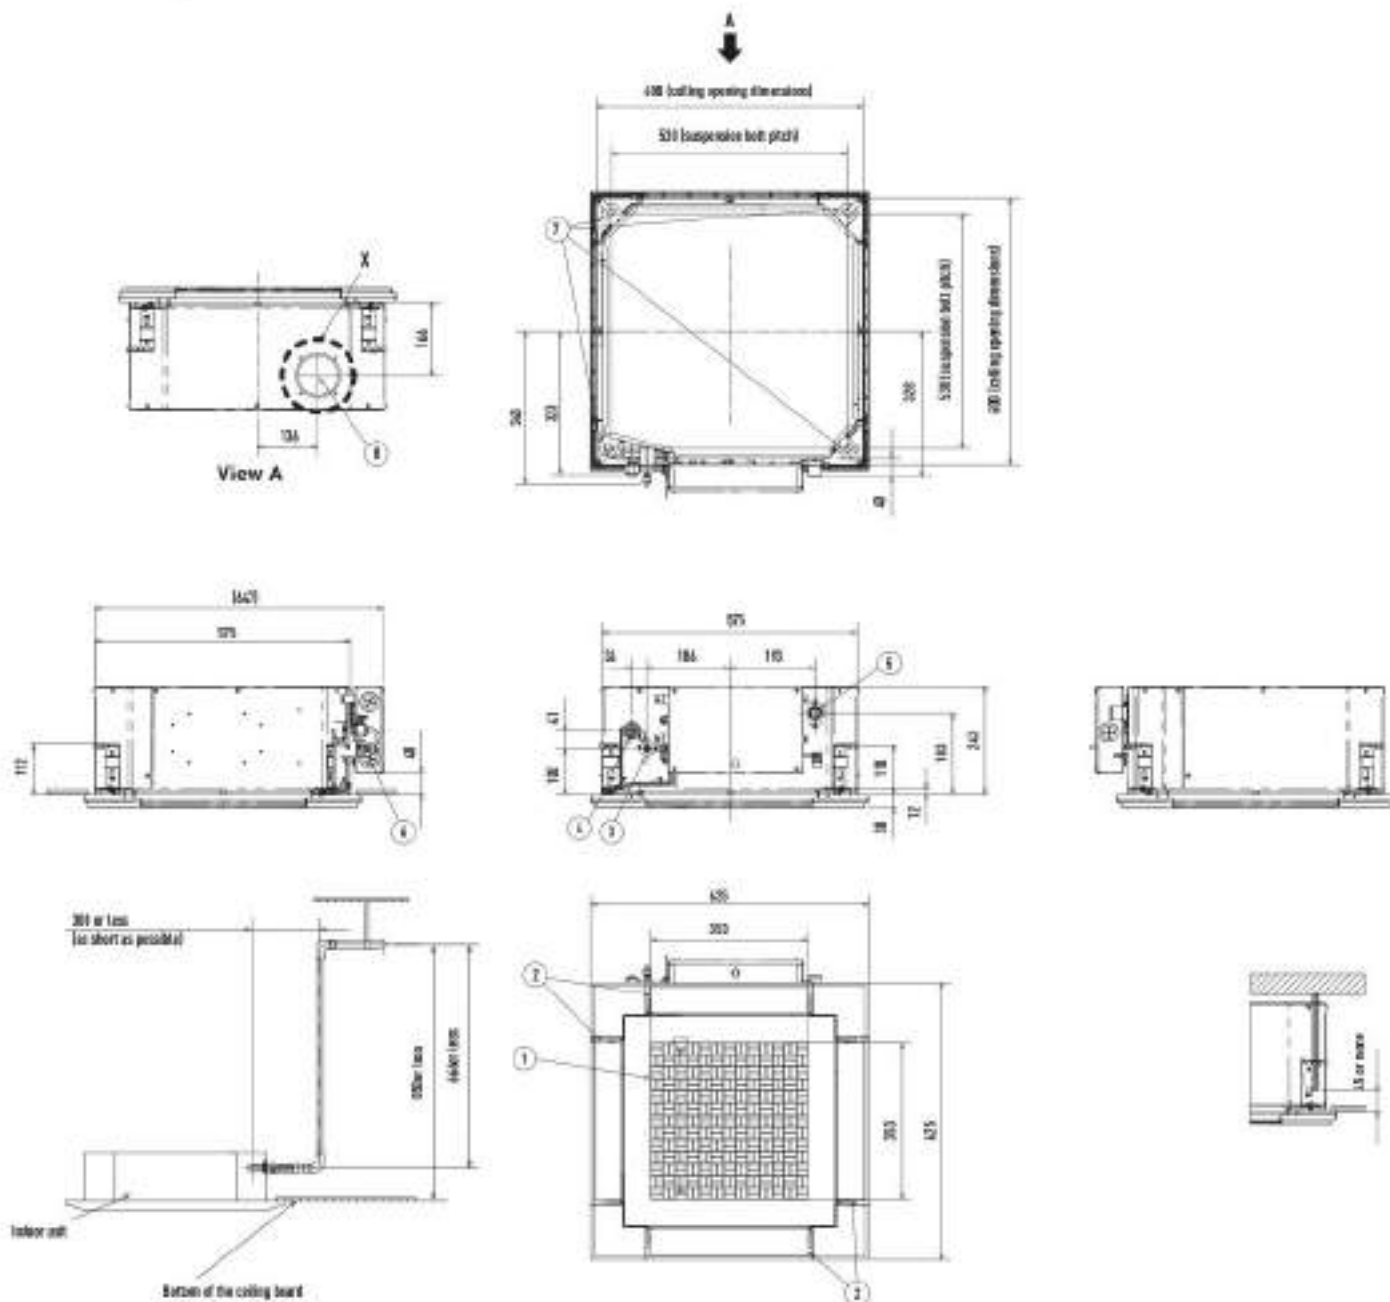


Low static pressure hide-away.

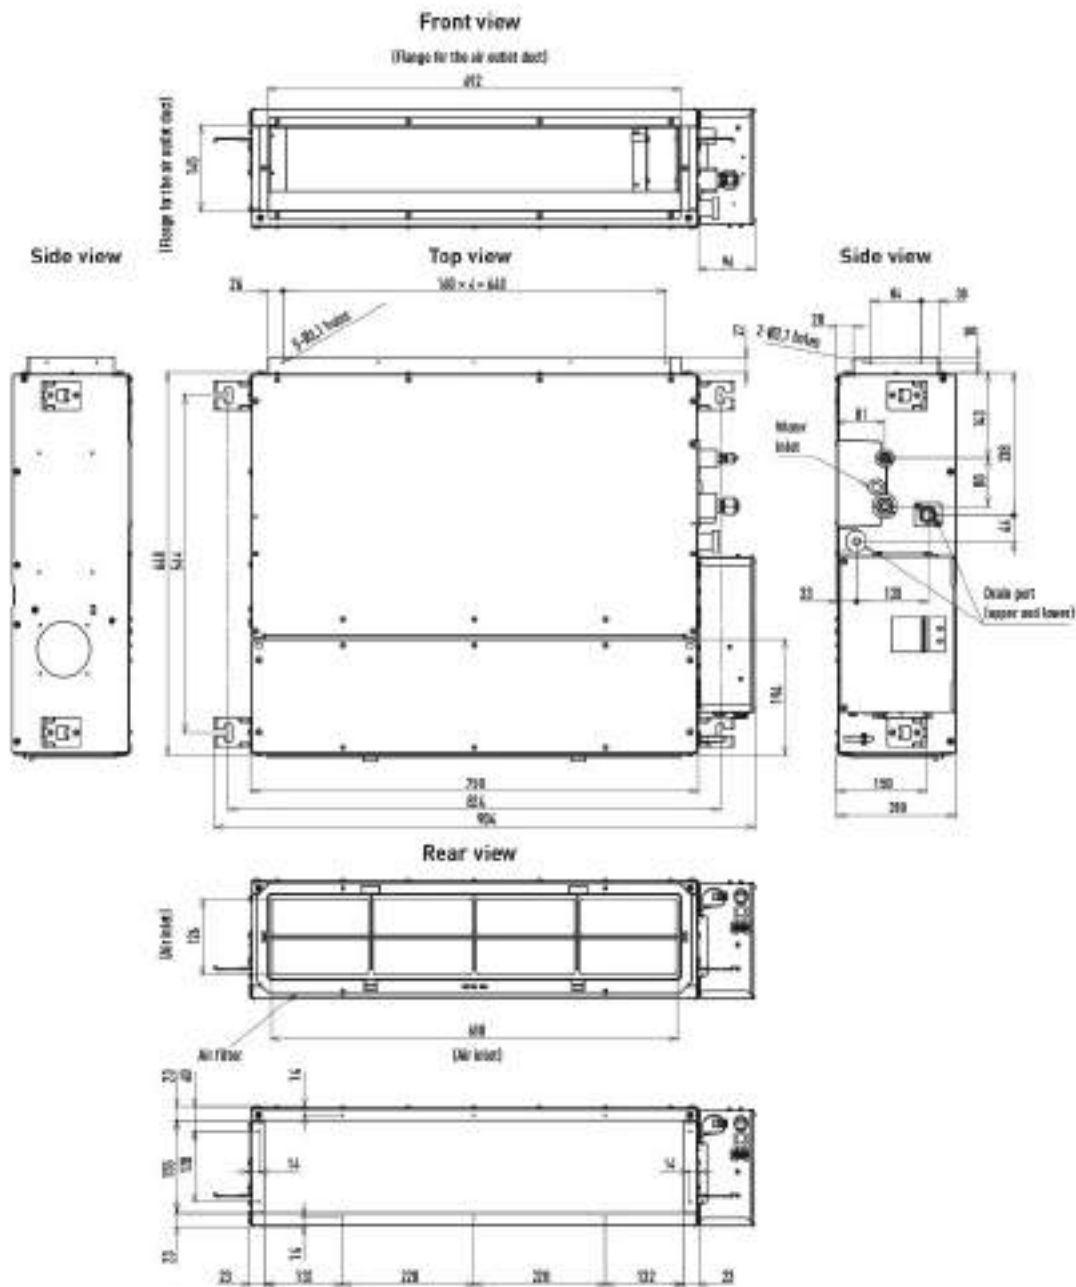


## Dimensions

Outdoor units Free Multi System Z


### CU-2Z35TBE / CU-2Z41TBE / CU-2Z50TBE

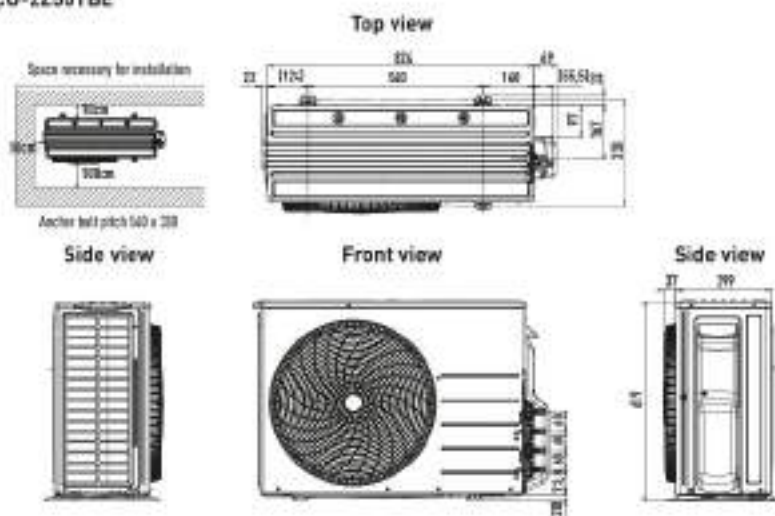

### CU-3Z52TBE / CU-3Z68TBE / CU-4Z68TBE

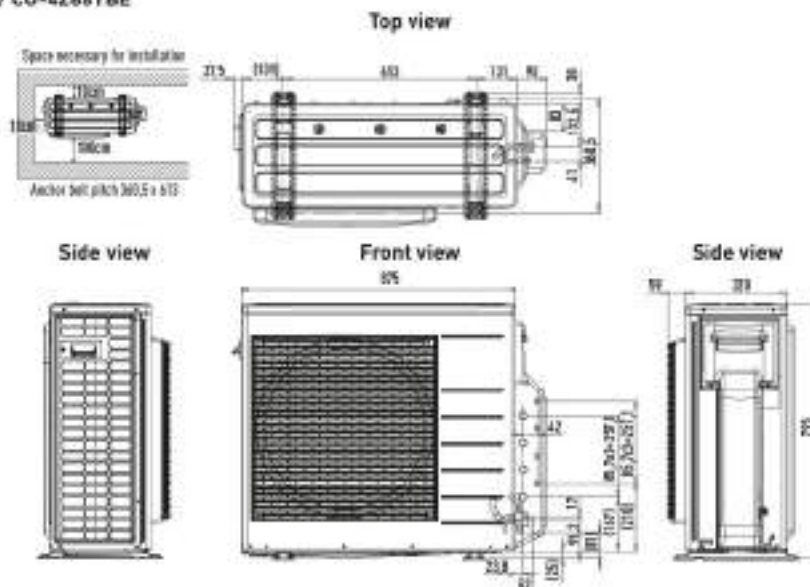

### CU-4Z80TBE / CU-5Z90TBE

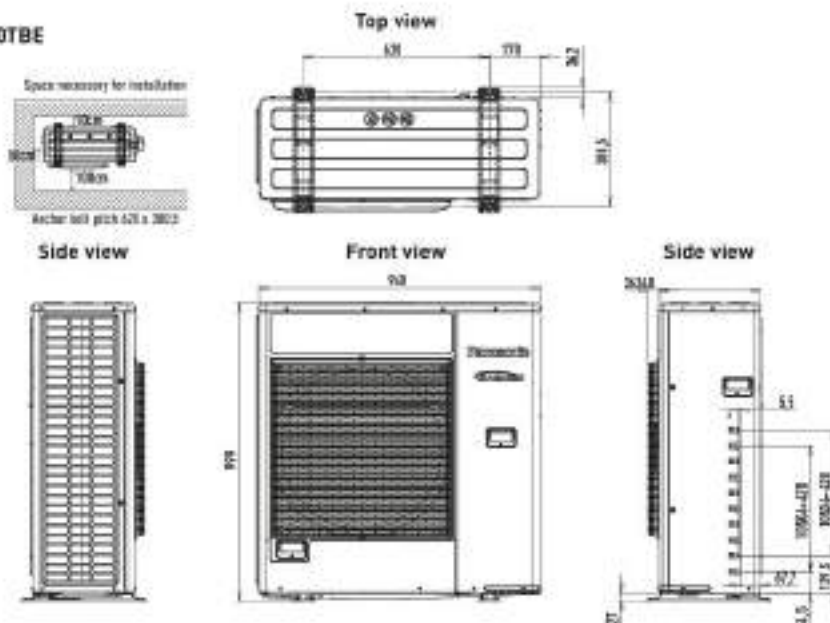


Unit: mm

## Wiring diagrams

### Free Multi System 2 rooms

Indoor unit

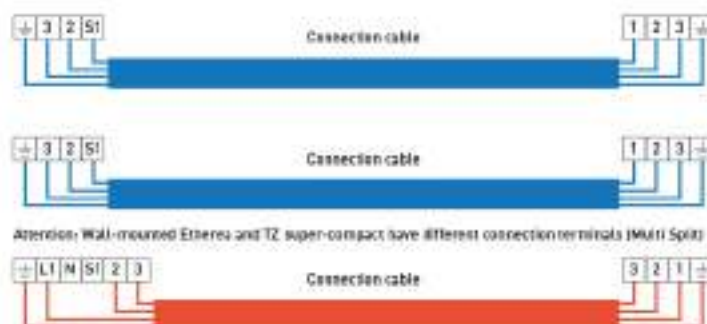

Attention: Wall-mounted Erseries and TZ super-compact have different connection terminals (Multi Split)

Outdoor unit




Single phase  
Power supply  
230 V / 50 Hz / 16 A

#### Single phase

| Outdoor unit | Power supply | Recommended fuse | Power supply cable      | Connection indoor / outdoor |
|--------------|--------------|------------------|-------------------------|-----------------------------|
| CU-2235TBE   | 230 V        | 16 A             | 3 x 1,5 mm <sup>2</sup> | 4 x 1,5 mm <sup>2</sup>     |
| CU-2241TBE   | 230 V        | 16 A             | 3 x 1,5 mm <sup>2</sup> | 4 x 1,5 mm <sup>2</sup>     |
| CU-2250TBE   | 230 V        | 16 A             | 3 x 1,5 mm <sup>2</sup> | 4 x 1,5 mm <sup>2</sup>     |
| CU-2T241TBE  | 230 V        | 16 A             | 3 x 1,5 mm <sup>2</sup> | 4 x 1,5 mm <sup>2</sup>     |
| CU-2T250TBE  | 230 V        | 16 A             | 3 x 1,5 mm <sup>2</sup> | 4 x 1,5 mm <sup>2</sup>     |

### Free Multi System 3 rooms

Indoor unit

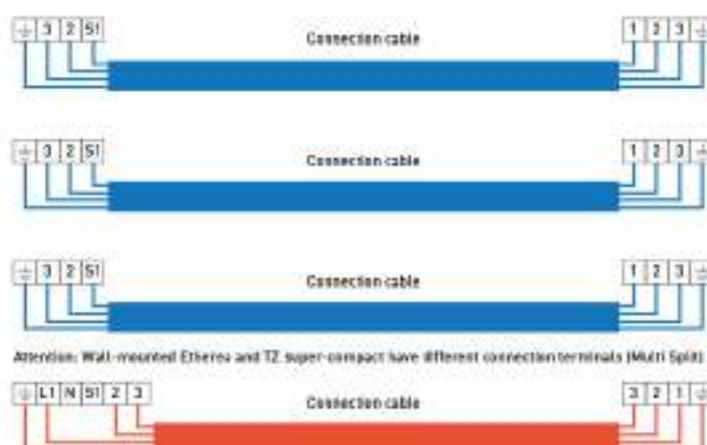

Attention: Wall-mounted Erseries and TZ super-compact have different connection terminals (Multi Split)

Outdoor unit



Single phase  
Power supply  
230 V / 50 Hz / 16 A


#### Single phase

| Outdoor unit | Power supply | Recommended fuse | Power supply cable      | Connection indoor / outdoor |
|--------------|--------------|------------------|-------------------------|-----------------------------|
| CU-3Z52TBE   | 230 V        | 16 A             | 3 x 2,5 mm <sup>2</sup> | 4 x 1,5 mm <sup>2</sup>     |
| CU-3Z68TBE   | 230 V        | 16 A             | 3 x 2,5 mm <sup>2</sup> | 4 x 1,5 mm <sup>2</sup>     |
| CU-3T252TBE  | 230 V        | 16 A             | 3 x 2,5 mm <sup>2</sup> | 4 x 1,5 mm <sup>2</sup>     |

Wiring diagrams

Free Multi System 4 rooms

Indoor unit

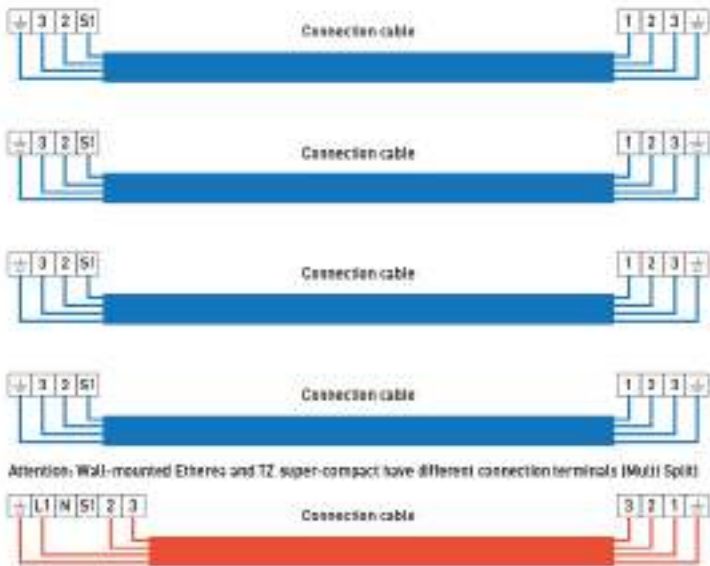

Attention: Wall-mounted Etheres and TZ super-compact have different connection terminals (Multi Split)

Outdoor unit




Single phase  
Power supply  
230 V / 50 Hz / 20 A

Free Multi System - R32

| Outdoor unit | Power supply | Recommended fuse | Power supply cable | Connection indoor / outdoor |
|--------------|--------------|------------------|--------------------|-----------------------------|
| CU-4Z68TBE   | 230 V        | 20 A             | 3 x 2,5 mm²        | 4 x 1,5 mm²                 |
| CU-4Z80TBE   | 230 V        | 20 A             | 3 x 2,5 mm²        | 4 x 1,5 mm²                 |


Free Multi System 5 rooms

Indoor unit

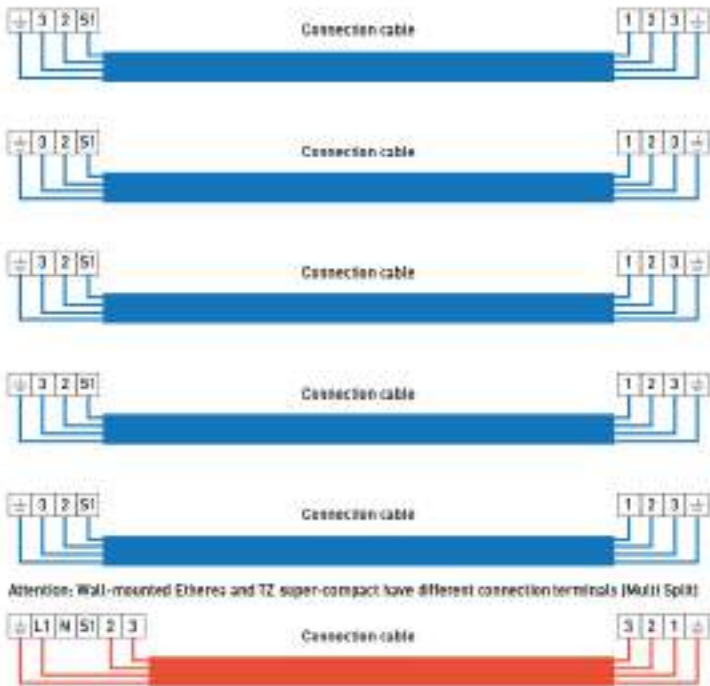

Attention: Wall-mounted Etheres and TZ super-compact have different connection terminals (Multi Split)

Outdoor unit



Single phase  
Power supply  
230 V / 50 Hz / 25 A

Free Multi System - R32

| Outdoor unit | Power supply | Recommended fuse | Power supply cable | Connection indoor / outdoor |
|--------------|--------------|------------------|--------------------|-----------------------------|
| CU-SZ90TBE   | 230 V        | 25 A             | 3 x 4,0 mm²        | 4 x 1,5 mm²                 |